
Technical Information Bulletin
LED Lamps

Date:		**Name of distributor:**	
In hands date of project:		**Client #:**	
Project name/Number:		**Name of end user:**	

ORDERING INFORMATION

Order code:	66763
Description:	C12/S2/4.5W/27K/CL/STD
UPC:	69549667631
Case quantity:	24 / 48

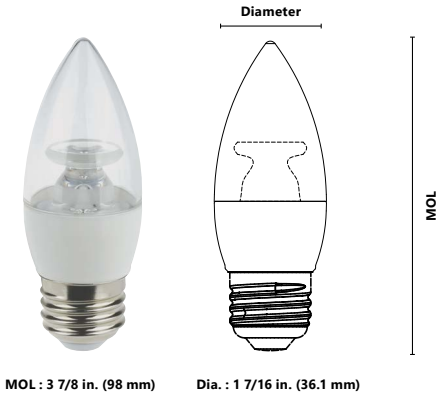

MOL : 3 7/8 in. (98 mm) **Dia. : 1 7/16 in. (36.1 mm)**

PERFORMANCE DATA

Shape:	C12
Base:	E26
Watts(W):	4.5
Volts (VAC):	120
Colour temperature (K):**	2 700
Life L70 (hrs):	15 000
Initial lumens (lm)*:	322
Initial lumens per watt (lm/W):	72
CRI:	82
Beam angle:	260
Power factor:	0.98
Operating temperature range:	-20 °C to 45 °C (-4 °F to 113 °F)

***Initial lumens range: +/- 10 %** ****Typical colour temperature range: +/- 5 %**

COMPATIBLE DIMMERS

Legrand	HCL453P, RH703PTUTC
Cooper	AAL06, DAL06P, SLC03P
Leviton	6674, DSL06-1LZ, DSM10-1LZ, IPL06
Lutron	AYCL-253P, CTCL-153P, DVCL-253P, DVELV-300P, MACL-153P

ENERGY STAR · DIMMABLE · DAMP · NO MERCURY · COMPLIANT · 3 YEARS WARRANTY · ICES 005

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Not for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Added weight of the device may cause instabillity of a free-standing portable luminaire. Use only with a portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- For complete dimmer and warranty information visit www.standardpro.com.
- 3 Years Limited Warranty.
- Opérating temperature : - 20°C to 45°C (-4°F to 113°F)

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____ Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

January 24, 2020