LEVITON


Industrial Grade

Extra Heavy-Duty Specification Grade Toggle and Locking Switches

Leviton's Industrial Grade AC toggle switches for extra heavy-duty applications represent top-of-the-line quality and peak performance. Leviton uses the finest materials available and the highest production standards to produce industrial switches of unmatched versatility and reliability.

Specifications and Features

- Top-of-the-line industrial quality
- Heavy gauge copper alloy one-piece arm for top performance
- Large silver cadmium-oxide contacts for long life, prevent sticking, welding and excessive pitting
- Color-coded covers: 15 Amp-Blue; 20 Amp-Red; 30 Amp-Green
- Fully enclosed switch mechanism in rugged housing for strength, tracking and arc resistance
- Brass combination-head terminal screws on Extra Heavy-Duty devices, steel combination head terminal screws on other devices
- Self-grounding clip (self-grounding when used with a grounded metal wallbox)
- Wire lead switches for fast and easy installation
- Backed by a Limited Ten-Year Warranty

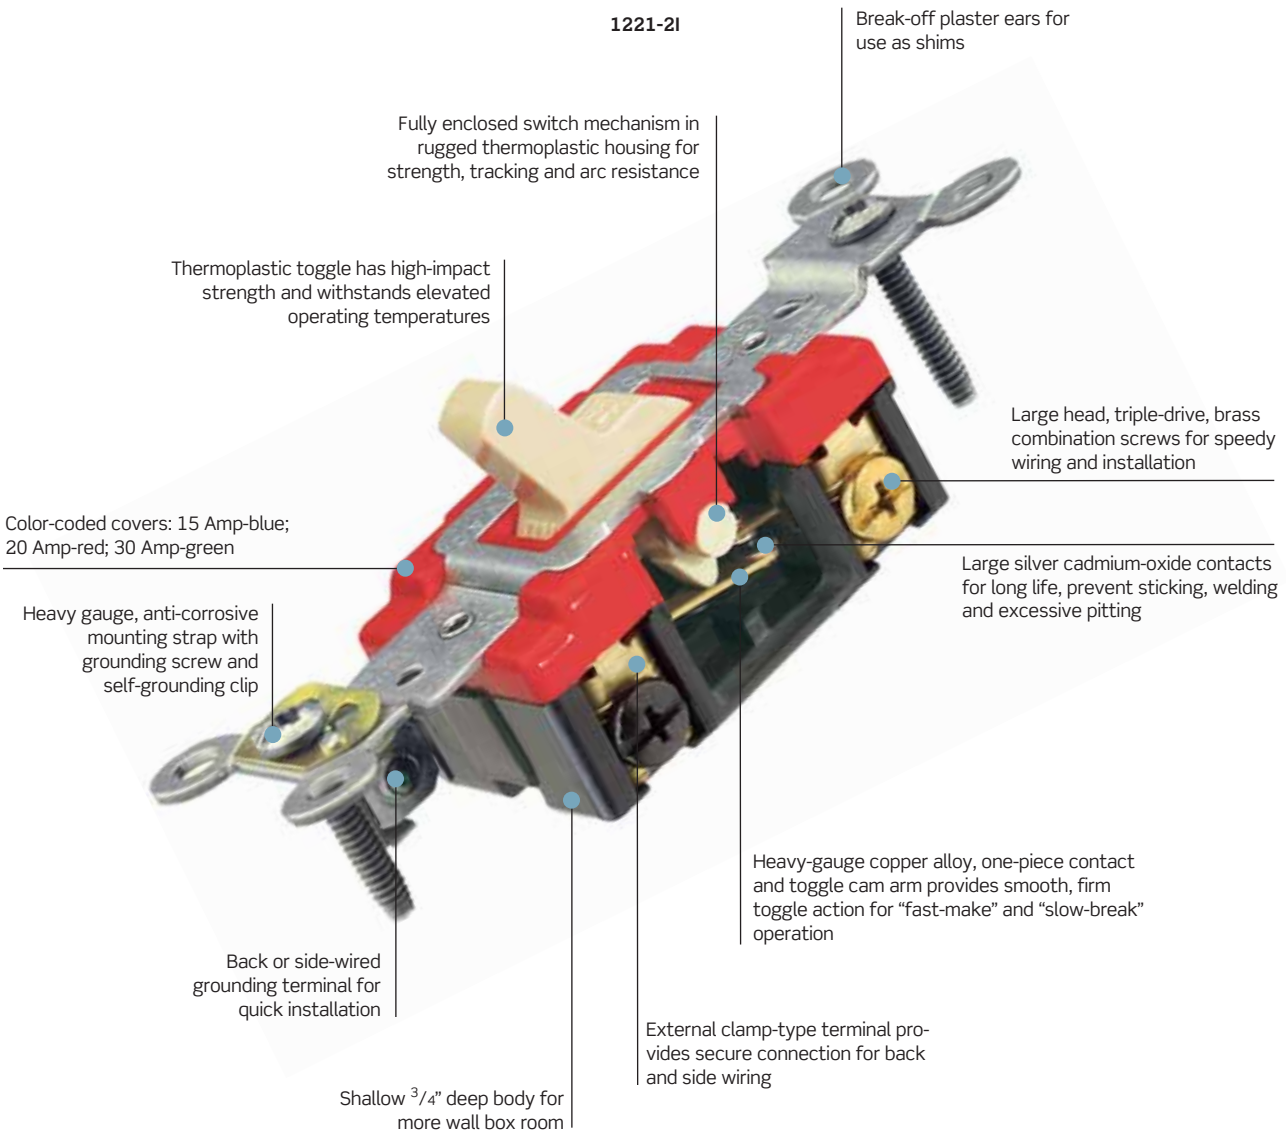

Continued From Previous Page >

Description	Color	Cat No.		
Rating			120/277VAC	
		15A	20A	30A
Heavy-Duty Single Pole	White		1221-SW	—
	Ivory		1221-SI	—
	Light Almond		1221-ST	—
	Grey		1221-SGY	—
	Brown		1221-S	—
	Red		1221-SR	—
Heavy-Duty Double Pole	White		1222-SW	—
	Ivory		1222-SI	—
	Grey		1222-SGY	—
	Brown		1222-S	—
Heavy-Duty 3-Way	White		1223-SW	—
	Ivory		1223-SI	—
	Light Almond		1223-ST	—
	Grey		1223-SGY	—
	Brown		1223-S	—
	Red		1223-SR	—
Heavy-Duty 4-Way	White		1224-SW	—
	Ivory		1224-SI	—
	Grey		1224-SGY	—
	Brown		1224-S	—

†Key for Locking Switch: Cat. No. 55500-PRT.
NOTE: Cat. Nos. 1201, 1221 feature external clamp-type wiring termination for back and side wiring.

BACK AND SIDE WIRED - CANADIAN S

Description	Color	Cat No.		
Rating			347VAC	
		15A	20A	30A
Single Pole	White	18201-W	18221-W	—
	Ivory	18201-I	18221-I	—
	Grey	18201-G	18221-G	—
	Brown	18201-B	18221-B	—
	Red	18201-R	18221-R	—
Single Pole, Locking†	Brown	18201-LB	18821-LB	—
Double Pole	Ivory	18202-I	18222-I	—
	Brown	18202-B	18222-B	—
Double Pole, Locking†	Brown	18202-LB	18222-LB	—
3-Way	White	18203-W	18223-W	—
	Ivory	18203-I	18223-I	—
	Grey	18203-G	18223-G	—
	Brown	18203-B	18223-B	—
	Red	18203-R	18223-R	—
3-Way, Locking†	Brown	18203-LB	18223-LB	—
4-Way	Ivory	18204-I	18224-I	—
	Grey	18204-G	—	—
	Brown	18204-B	18224-B	—
	Red	18204-R	—	—

†Key for Locking Switch: Cat. No. 55500-PRT.
NOTE: Cat. Nos. 18201, 18221, 1203, 1223, 18203 and 18223 feature external clamp-type wiring termination for back and side wiring.

TESTING AND CODE COMPLIANCE
- Meets all NEMA WD 1 & 6, and ANSI requirements
- Meets Federal Specification WS-896
- UL Listed (File #E-7458)
- CSA Certified (File #152105)
- NOM Certified (#057)


MATERIAL CHARACTERISTICS
- Environmental: Flammability, Rated V2
- Operating Temperature: -40°C to 65°C

ELECTRICAL
- Dielectric Voltage: Withstands 1500V for 1 min.
- Overload UL 20 Test: 100 cycles of overload at 4.8 times rated current
- Temp. Rise: 30° C max at full rated current
- Endurance: UL 20/Fed Spec 50,000 cycles min., tungsten filament lamp load (Fed.Spec.) WS896E, SP, DP, 3-Way, 4-Way, Pilot Light, Illum., Key Lock


MECHANICAL
- Terminal I.D.: Brass-Hot, Black-Hot, White-Neutral, Green-Grounding
- Terminal Accomm.: #14-#10 AWG back wired; #14-#12 AWG side wired
- Product I.D.: Ratings are permanently stamped on device strap
- Torque Range: 12-14 inch pounds

HORSEPOWER
- 15A — ½ @ 120V, 2 @ 240V 12 AMP Max
- 20A — 1 @ 120V, 2 @ 240V 16 AMP Max
- 30A — 2 @ 120V, 2 @ 240V 24 AMP Max


DIMENSIONS

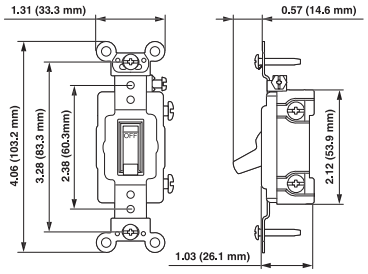

SINGLE-POLE

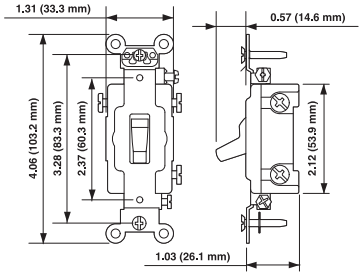

3-WAY

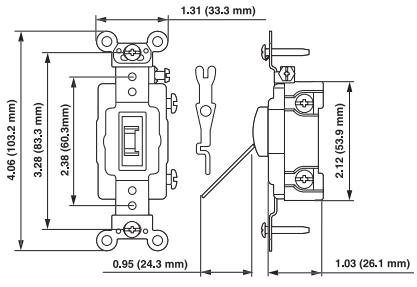

LOCKING

