Technical Information Bulletin

LPDL LED Downlight

Date: _____
In hands date of project: _____
Project name/Number: _____
Name of distributor: _____
Client #: _____
Name of end user: _____



ORDERING INFORMATION

Order code:	65937
Description:	LPDL4/S2/RND/9W/30K/WH/STD
UPC:	69549659377
Case quantity:	24


PERFORMANCE DATA

Shape:	Round
Type:	LED LPDL 4"
Lens type:	PS (Acrylic)
Trim finish:	White
Wattage (W):	9
Voltage (VAC):	120
Beam angle:	120°
Color temperature (K):**	3 000
Lumens (lm)*:	550
Lumens per watt (lm/W):	61
Life (hours):	50 000
CRI:	80
Dimming type:	Forward phase
THD (%):	<40
Power factor:	>0.9
Operating temperature range:	- 20 °C / - 4 °F to 45 °C / 113 °F

***Initial lumens range: +/- 5 %** ****Typical colour temperature range: +/- 5 %**

ICES 005 · DAMP · AIR TIGHT · IC RATED · 5 YEARS WARRANTY · RoHS COMPLIANT · DIMMABLE · ENERGY STAR · ETL LISTED · FC

TECHNICAL DRAWINGS

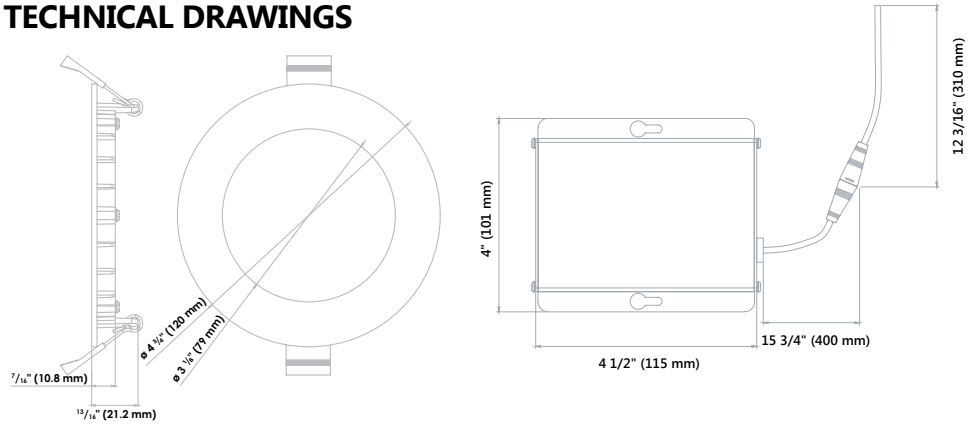

Hole cut size
Ø 4 ¼" (108 mm)

CAN ICES-005 (B) - This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
For a complete list of ENERGY STAR qualified products, please visit www.standardpro.com
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

August 29, 2017

STANDARD®


Technical Information Bulletin

LPDL LED Downlight

ORDERING INFORMATION

Order code:	65937
Description:	LPDL4/S2/RND/9W/30K/WH/STD
UPC:	69549659377
Case quantity:	24

PHOTOMETRICS - BEAM SPREAD*

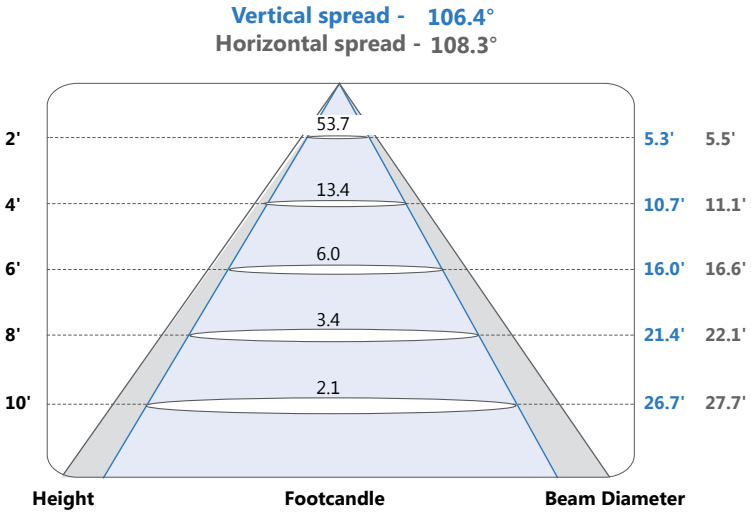

* complete IES files available on our website.

COMPATIBLE DIMMER LIST

Brand:	Model
Legrand	HCL453P
Cooper	9531AW, DAL06P, SLC03P
Leviton	6615, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06
Lutron	CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, MACL-153P, NTELV-600, PD-6WCL, SELV-300P

*NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance.
Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Standard recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Do not mix products of different wattages or types on the same dimming circuit. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____ Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

August 29, 2017

STANDARD®