

Connections overview


Load connections*

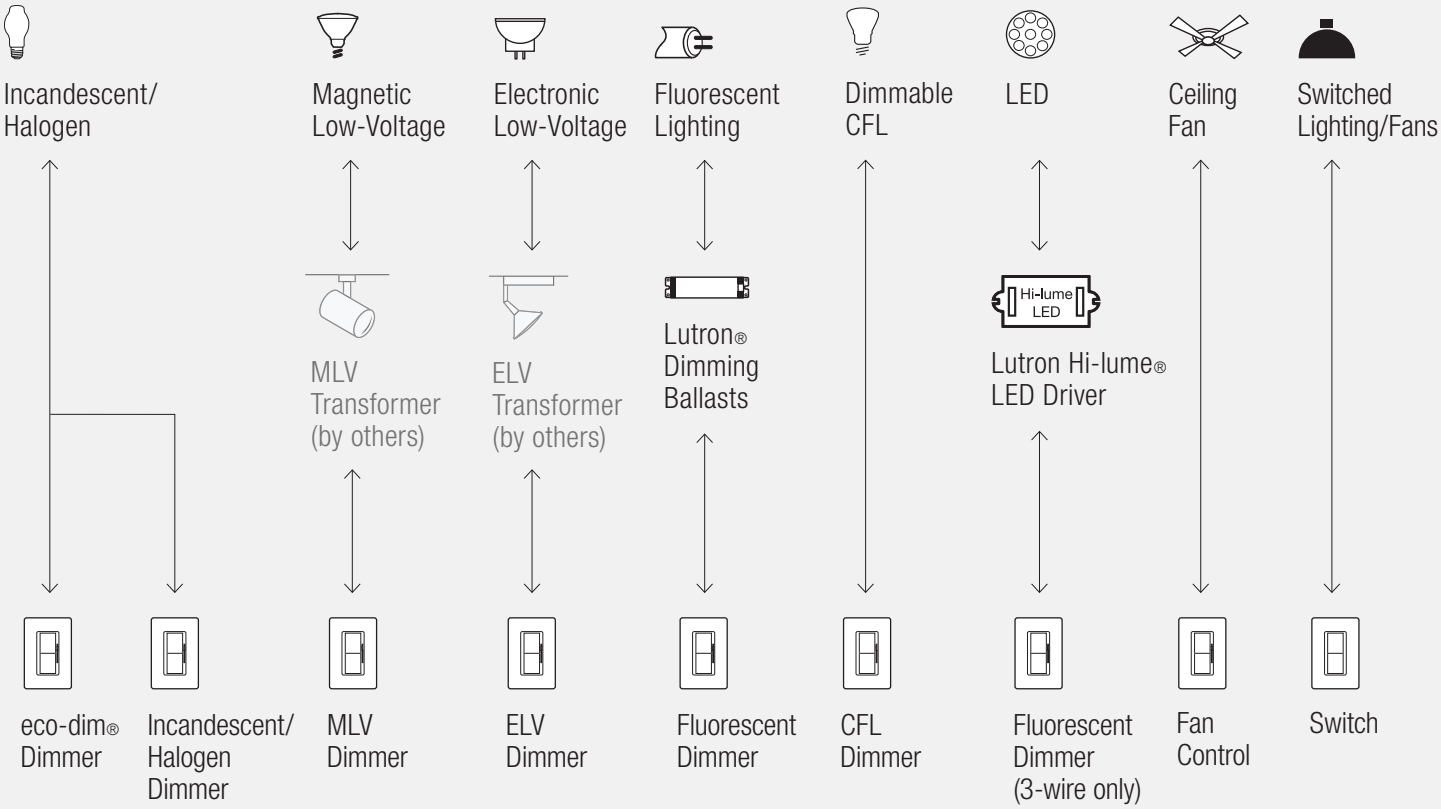

Control types (for 2 or more locations)

Dim from one location, switch from the others

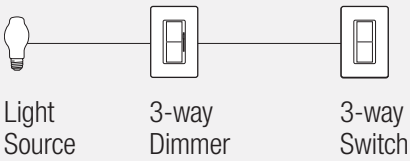

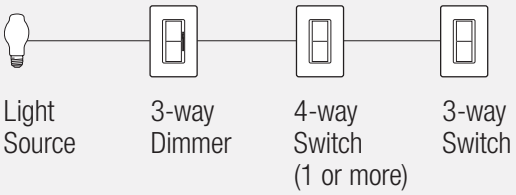

For more information on ballasts, visit **www.lutron.com/ballasts**.
For more information on LED drivers, visit **www.lutron.com/LED**.

*__For illustration purposes only.__ Consult model number pages for specific voltage and capacity information.

Dimmer model numbers

Incandescent/halogen dimmers

Dimmers	
Single-pole 120V 600W	DV-600P-**CC**[3] DVSC-600P-**CC**[4]
Single-pole 120V 1000W	DV-10P-**CC**[3] DVSC-10P-**CC**[4]
3-way 120V 600W	DV-603P-**CC**[3] DVSC-603P-**CC**[4]
3-way 120V 1000W	DV-103P-**CC**[3] DVSC-103P-**CC**[4]

eco-dim® dimmer with locator light

3-way/single-pole 120V 600W	DV-603PG-**EE**[2]

eco-dim model guarantees at least 15% energy savings compared to a standard switch.

Magnetic low-voltage dimmers

Dimmers	
Single-pole 120V 600VA (450W)	DVLV-600P-**CC**[3] DVSCLV-600P-**CC**[4]
Single-pole 120V 1000VA (800W)	DVLV-10P-**CC**[3] DVSCLV-10P-**CC**[4]
3-way 120V 600VA (450W)	DVLV-603P-**CC**[3] DVSCLV-603P-**CC**[4]
3-way 120V 1000VA (800W)	DVLV-103P-**CC**[3] DVSCLV-103P-**CC**[4]

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

CC[3]: Gloss color codes, see pg. 87
CC[4]: Satin color codes, see pg. 87
EE[2]: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)

(Wallplates not included with above, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

Dimmer model numbers

Electronic low-voltage dimmers*

Dimmers	
Single-pole	DVELV-300P-**CC**[3]
120V 300W	DVSCELV-300P-**CC**[4]
3-way	DVELV-303P-**CC**[3]
120V 300W	DVSCELV-303P-**CC**[4]

Only certain LED drivers are dimmable using an ELV dimmer, visit **www.lutron.com/LED** for more information.

Philips DIMMABLE Energy Saver CFLs (screw base)

Dimmers	
3-way/single-pole 200W	DVPDC-203P-**CC**[3]

UL listed for Philips screw base dimmable compact fluorescent lamps (CFL).

Use only with Philips models: EL/A R30 DIM, R40 DIM, PAR38 DIM.

No derating required if ganged.

3-wire fluorescent dimmers*

Dimmers	
3-way/single-pole	DVF-103P-**CC**[3]
120V 8A	DVSCF-103P-**CC**[4]
3-way/single-pole	DVF-103P-277-**CC**[3]
277V 6A	DVSCF-103P-277-**CC**[4]

For use with Hi-lume®, Hi-lume® Compact SE, Hi-lume® 3D, Eco-10®, EcoSystem® ballasts.

Also compatible with Hi-lume® LED driver.

No derating required if ganged.

Adjustable low-end trim.

0-10V dimmers

(current sink control)

Dimmers	
Single-pole 30mA max control current	DVTV-**CC**[3]
Single-pole 30mA max control current	DVSCTV-**CC**[4]

Control provides dimming signal only. For dimming with on/off switching, **use with Lutron PowerPack**: PP-120H, PP-277H or PP-347H.

Consult ballast manufacturer for specific ballast current draw to determine maximum number of ballasts per control.

For compatible 0-10V LED drivers by others, visit **www.lutron.com/LED**.

No derating required if ganged.

Adjustable high-end and low-end trim.

Tu-Wire® fluorescent dimmers

Dimmers	
3-way/single-pole	DVFTU-5A3P-**CC**[3]
120V 5A	DVSCFTU-5A3P-**CC**[4]

Also compatible with Advance Mark X ballasts, for further information visit **www.lutron.com/advance**.

For information on use with Universal and OSRAM ballasts, contact Technical Support at 1.800.523.9466.

CC[3]: Gloss color codes, see pg. 87
CC[4]: Satin color codes, see pg. 87
(Wallplates not included with above, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.
For more information on Lutron ballasts, visit **www.lutron.com/ballasts**.

*Requires neutral wire connection.

Dimmer model numbers

Hi-lume® LED drivers: 3-wire fluorescent dimmers*

Dimmers

3-way/single-pole 120V 8A	DVF-103P-**CC**[3]
	DVSCF-103P-**CC**[4]
3-way/single-pole 277V 6A	DVF-103P-277-**CC**[3]
	DVSCF-103P-277-**CC**[4]

Exclusively compatible with Hi-Lume LED driver

For more information on Hi-lume LED drivers, visit **www.lutron.com/HilumeLED**.

No derating required if ganged.

Adjustable low-end trim.

0-10V LED dimmers: 0-10V dimmers

(current sink control)

Dimmers

Single-pole 30mA max control current	DVTV-**CC**[3]
Single-pole 30mA max control current	DVSCTV-**CC**[4]

Control provides dimming signal only. For dimming with on/off switching, **use with Lutron PowerPack**: PP-120H, PP-277H or PP-347H.

Consult ballast manufacturer for specific ballast current draw to determine maximum number of ballasts per control.

For compatible 0-10V LED drivers by others, visit **www.lutron.com/LED**.

No derating required if ganged.

Adjustable high-end and low-end trim.

CC[3]: Gloss color codes, see pg. 87
CC[4]: Satin color codes, see pg. 87
EE[2]: Only available in Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)
EE[10]: Available in Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG) and Snow (SW)

(Wallplates not included with above, order separately, see pg. 160)

Fan control and switch model numbers

Fan controls

Fan controls—quiet 3-speed

3-way/single-pole 120V 1.5A	DVFSQ-F-**CC**[3]
	DVSCFSQ-F-**CC**[4]
3-way/single-pole 120V 2.0A	DVFSQ-F-HO-**CC**[3]

DVFSQ-F-HO model for use with specific fans such as Hunter Original Series.

Does not include built-in locator light.

No derating required if ganged.

Switches

General purpose switches

Single-pole 120/277V 15A	CA-1PSH-**CC**[3]
	SC-1PS-**CC**[4]
3-way 120/277V 15A	CA-3PSH-**CC**[3]
	SC-3PS-**CC**[4]
4-way 120/277V 15A	CA-4PSH-**CC**[3]
	SC-4PS-**CC**[4]

General purpose switches with locator light

Single-pole 120V 15A	CA-1PSNL-**EE**[2]
	SC-1PSNL-**EE**[10]
3-way 120V 15A	CA-3PSNL-**EE**[2]
	SC-3PSNL-**EE**[10]
4-way 120V 15A	CA-4PSNL-**EE**[2]
	SC-4PSNL-**EE**[10]

No derating required if ganged.

All models must be derated if ganged unless otherwise noted, see pg. 170.

***Requires neutral wire connection.**