# 2320

# Locking Wiring Devices



**Color:** Black

**UPC Code:** 07847780120

**Country of Origin:** Please Contact Customer Service

**NEMA:** L6-20R



**Brand Features**

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

**Item Description**

20 Amp, 250 Volt, NEMA L6-20R, 2P, 3W, Flush Mtg Locking Receptacle, Industrial Grade, Grounding, V-0-MAX - BLACK

**Technical Information**

AC Horsepower Ratings

**At Rated Voltage:** 2 HP

**Horsepower Rating:** 2 HP

Electrical Specifications

**Grounding:** Grounding

**Amperage:** 20 Amp

**Voltage:** 250 Volt

**NEMA:** L6-20R

**Pole:** 2

**Wire:** 3

**Dielectric Voltage:** Withstands 2000V per UL498

**Current Limiting:** Full Rated Current

**Temperature Rise:** Max 30C after 250 cycles OL at 200 percent rated current

Environmental Specifications

**Flammability:** Rated V-0 per UL94

**Operating Temperature:** -40C to 60C

Material Specifications

**Face Material:** Ultramid

**Base Material:** Valox

**Line Contacts:** Brass .040 Thick

**Terminal Screws:** Brass 10-32

**Grounding Screw:** Brass 8-32

**Body Material:** Nylon

**Cover Material:** Valox 357

**Line Contacts:** Brass

**Terminal Screws:** Chromated Brass

**Grounding Screw:** Chromated Brass

**Strap Material:** Nickel-Plated Brass

**Color:** Black

**Ground Contacts:** Brass

Mechanical Specifications

**Terminal ID:** Brass-Hot, Green-Ground, White-Neutral

**Terminal ID:** Brass-Hot, Green-Ground, Silver-Neutral

**Terminal Accom.:** 14-8 AWG

**Product ID:** Ratings and NEMA I.D. permanently marked on device

**Termination:** Back & Side

Product Features

**Face Material:** Ultramid

**NEMA:** L6-20R

**Base Material:** Valox

**Color:** Black

**Warranty:** Lifetime Warranty

Standards and Certifications

**NEMA:** WD-6

**NEMA:** WD-1 & WD-6

**ANSI:** C-73

**NOM:** 057


**UL:** 498

**CSA:** C22.2 No. 42


**UL Fed Spec:** W-C-596

Warranty

**Warranty:** Lifetime Limited

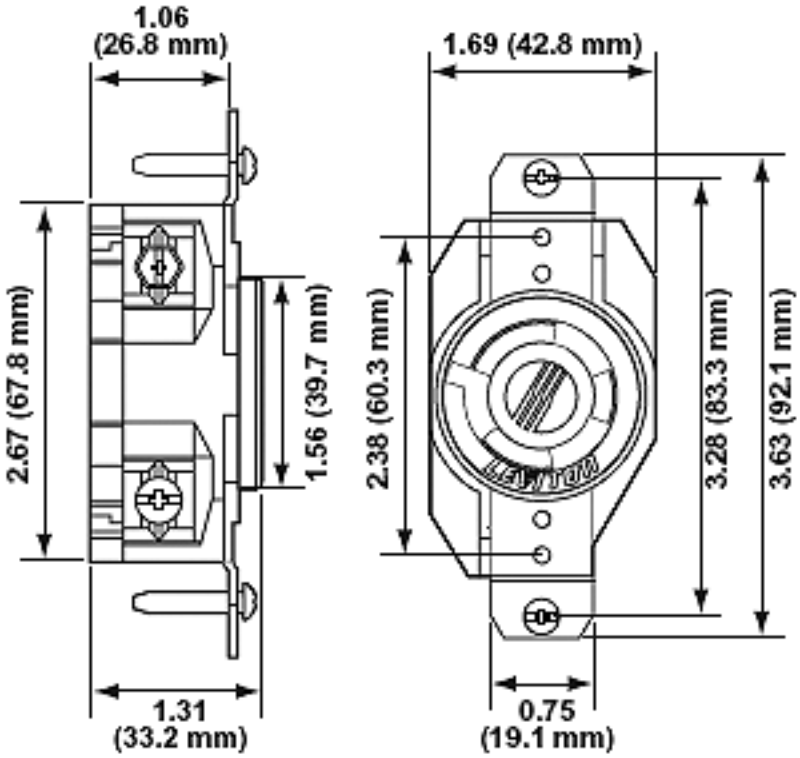


## Wiring Diagram

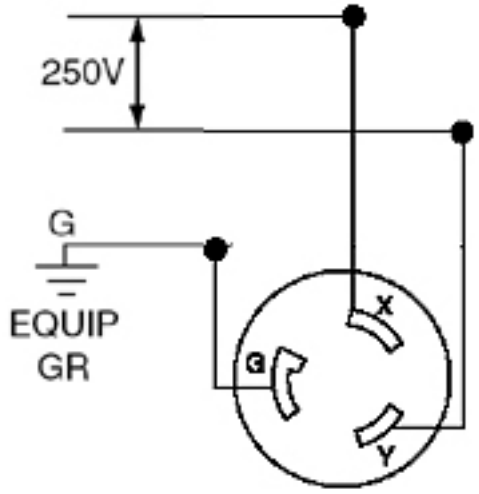


L6-20R

SPECIFICATION SUBMITTAL

| JOB NAME: | | CATALOG NUMBERS: | |
|---|---|---|---|
| JOB NUMBER: | | | |

**Leviton Manufacturing Co., Inc.**
201 North Service Road, Melville, NY 11747
Telephone: 1-800-323-8920 · FAX: 1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**
165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: 1-800-469-7890 ·
FAX: 1-800-824-3005 · www.leviton.com/canada

**Leviton S. de R.L. de C.V.**
Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

**Visit our Website at: www.leviton.com**
© 2012-2016 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

**Leviton has a global presence.**
If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/